



Rev	Date	Content	Approved
B			Sepehr


## FRONT

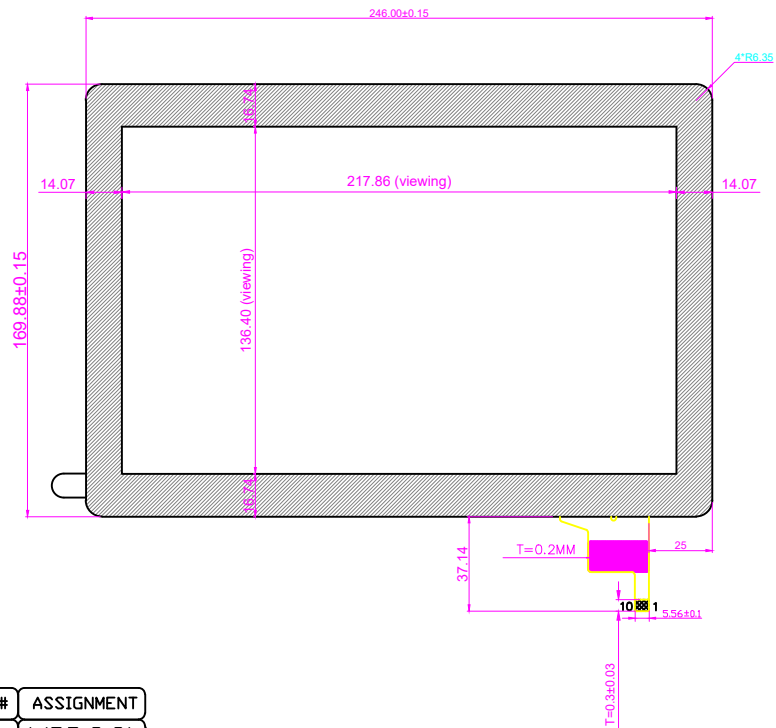

## SIDE

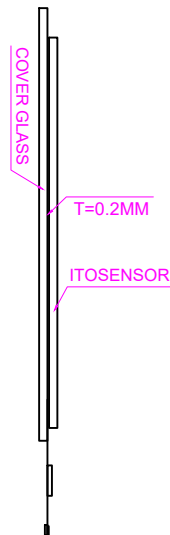

## BACK

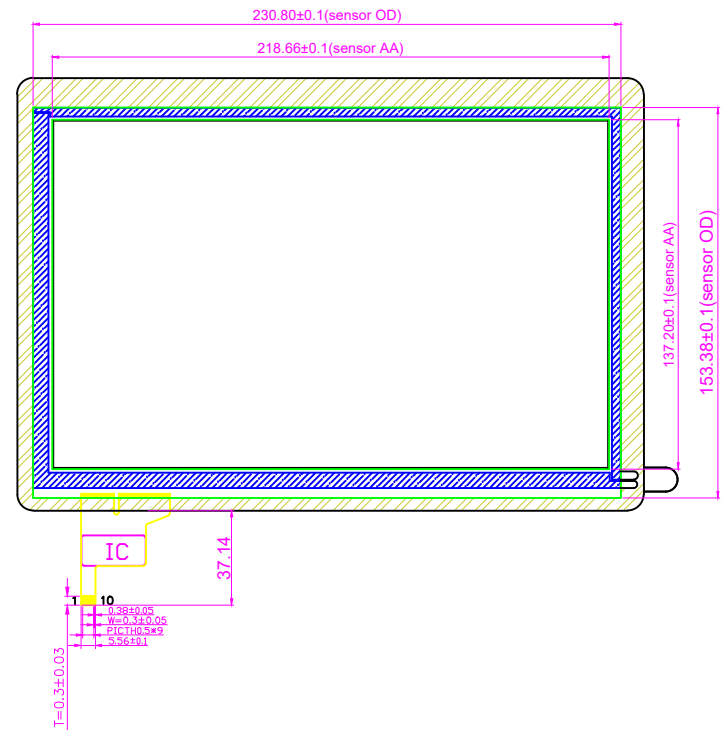

PIN#	ASSIGNMENT
1	VDD.3.3V
2	GND
3	SDA
4	SCL
5	INT
6	RESET
7	NC
8	NC
9	NC
10	WAKE

### Remarks:

1. ITO glass+cover glass+FPC
2. Working voltage: 2.8V-3.3V
3. Light transmission > 85%
4. IC: FT5426
5. Surface harness: 7H
6. Operating temp.  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
7. Storage temp.  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
8. All tolerance without marked:  $\pm 0.2 \text{mm}$

Unit	mm	SIZE	A4	PRJ(3)	SE-TP(IVO)-101008		
Tolerances		: $\pm 0.2$					
Page		1 of 1					
Confirm By :		Date :		Product NO :			
Checked By :		Date :		Drawing NO : SE-TP(IVO)-101008			
Drawn By :	Sepehr	Date :		Customer Product NO :			